




**DAYTIME RUNNING LIGHT HARNESS - P/N 05-2000-37**  
**For DELTA Headlamps, 500, & 550 Series Lights Equipped with City Lights**

**INSTALLATION INSTRUCTIONS**

1. Plug yellow wire onto 1 terminal of bulb socket and black wire onto the other terminal.
2. Repeat steps 1 for the other headlamp.
3. Run the harness loom through the engine compartment on the driver's side.
4. Using cable ties (included), attach the harness to the factory wire bundle away from the engine.
5. Using a metal sheet screw, attach the ring terminal on the black wire to any metal object under the hood to ground.
6. Tracing the existing factory wire loom, run bare yellow wire through the firewall under the dashboard.
7. Locate hot ignition wire leading from ignition switch by making a small incision in the wire jacket. Touch bare yellow wire to incision when ignition switch is on. If daytime running lights are on when ignition is on and off when ignition is off, you have located the correct wire.
8. Using provided blue snap lock connector, splice yellow wire into the selected ignition switch wire.

Your Daytime Running Lights will now operate each time you turn your ignition and while you drive your vehicle.

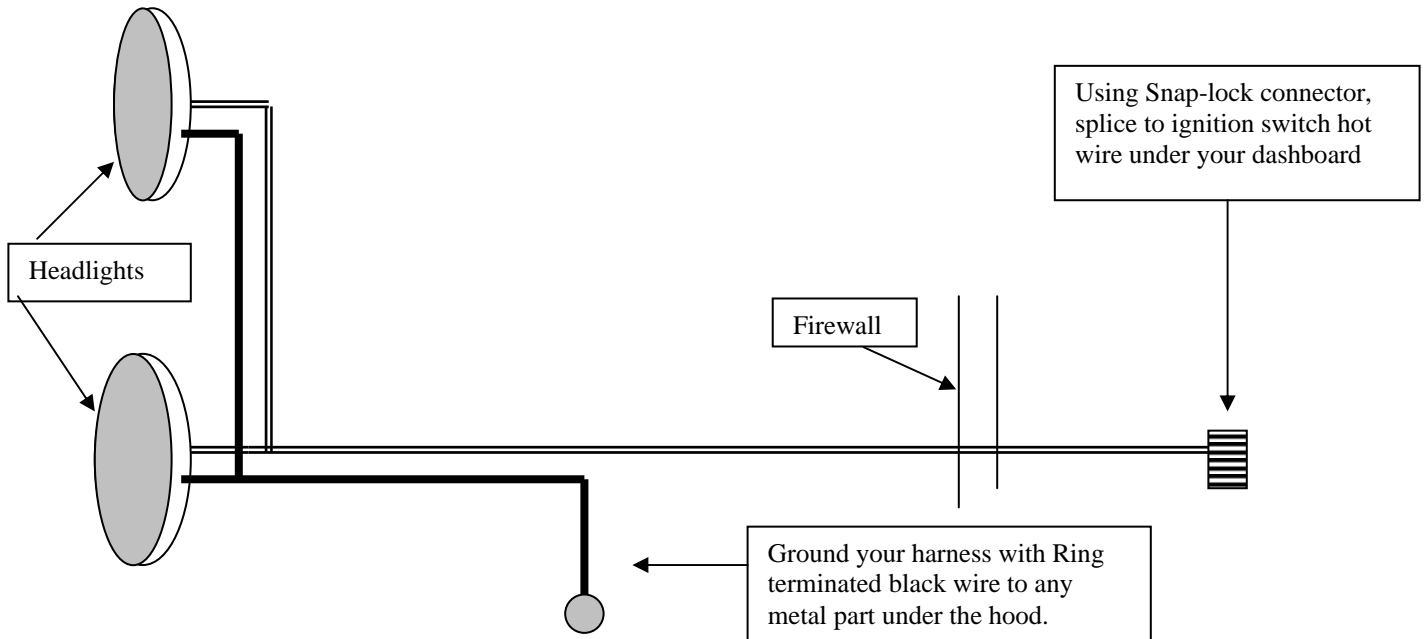

**CONTENT:**

- Wiring Harness
- Snap lock connector
- Cable Ties